

The Eco-Mini Plus RFID Tag is designed for on-metal usage. It resists moderate cleaning, chemicals, solvents, fuels and oils, making it ideal for applications where repeated usage is required, such as tracking tools or assets.


### Material and Design Specifications

- Overall dimensions 2.75" x 0.75" x 0.040" (69.85 x 19.05 x 1.02 mm)
- 0.002" (0.051 mm) pressure sensitive adhesive
- White thermal transfer receptive polyester face stock
- Rated for moderate to harsh indoor environments
- Material is produced blank/no encoding \*\*Service Bureau printing/encoding is a custom option

### Technical Specifications

- **Read Range:** Up to 25 ft. (7.62 m) on metal
- **RF protocol:** EPC Global Class 1 Gen 2
- **Frequency:** FCC 902-928 MHz
- Multiple IC options available

### Radiation Pattern

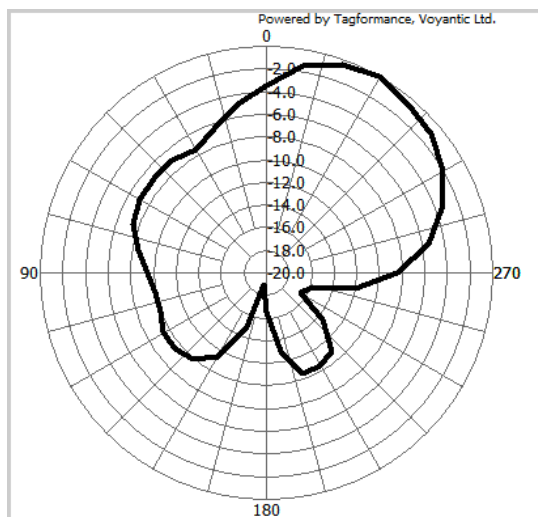

## ECO Mini<sup>PLUS</sup>

### UNIVERSAL RFID TAG

### Key Features

- Up to 25 ft. (7.62 m) read range
- Onsite-printable
- Service bureau option available

### Applications

- Asset Tracking
- Inventory Management
- IT Asset Tracking
- Tool Tracking
- Work-in-Progress
- Warehouse

### Printer Recommendations

- Printronix T6000e
- SATO CL4NX Plus
- Zebra ZT411r

### Ribbon Recommendations

- Wax/Resin DNP TRX-50
- Wax/Resin IMP General Purpose
- Resin DNP V300
- Resin TR4070

### Environmental Specifications

- Minimum Application Temperature: 50 °F (10 °C)
- Temperature Range: -40 °F to +175 °F (-40 to 79.4 °C)
- UV Resistance: Recommend indoor use only
- Chemical Resistance: Can withstand mild cleaning chemicals and brief exposure to solvents
- Minimum bend radius: 3" or 76.20 mm (when wrapped horizontally around a curved surface)

## Test Results

These tests were conducted for a limited period in strict laboratory conditions. To achieve maximum satisfaction, we highly recommend any customer considering use of this product test the labels in the environment in which they will be used.

**Chemical Soak Test:** Summarizes if tag survived soaking in fluids noted below for 2 hours in room temperature conditions without falling apart and the inlay still responding. Note: Thermal transfer print results are dependent on the type of ribbon used. A full resin ribbon is recommended for maximum durability.

Product	Water	Glass Cleaner	Bathroom Cleaner	99% Isopropyl Alcohol	Acetone	Sodium Hydroxide	Nitric Acid	Hydrochloric Acid	Brake Fluid	Diesel
Eco Mini Plus RFID Tag	NE	NE	NE	NE	NR	NE	NE	NE	NE	NE

Key: NE = No Effect, NR = Not Recommended

**Temperature Resistance:** Note - Inlay may stop responding above 185 °F (85 °C) or below -40 °F (-40 °C); will need to bring tag within this temperature range for proper operation.

Product	-40 °F (-40 °C) 24 hours	200 °F (93.3 °C) Continuous	250 °F (121.1 °C) 1 Hour	300 °F (148.9 °C) 1 Hour
Eco Mini Plus RFID Tag	NE	NE	NE	NR

Key: NE = No Effect, NR = Not Recommended

**Outdoor Exposure:** Test Method - ASTM D4329 using QUV Weatherometer. Test consisted of 8 hours of UV exposure with UVA-340 lamps followed by 8 hours of condensation. Test determines if tag materials survive exposure without yellowing or cracking, and verify that the inlay still reads.

Product	2,000 Hours of Exposure
Eco Mini Plus RFID Tag	NE

Key: NE = No Effect

## Installation Instructions

1. Clean the surface using Isopropyl alcohol, alcohol pad or equivalent solvent to ensure surface is free from dirt, dust, oil and misc. debris that may affect adhesion.
2. Handle the tag by edges, peel release liner from back ensuring not to touch the adhesive.
3. Place the tag in desired tagging location and firmly apply even pressure to the tag for 5 seconds.
4. Do not disturb the newly mounted tag for at least 72 hours to ensure proper adhesive sealing.

## Industry Compliance

